


DESIGN REQUIREMENTS


**TOLERANCES: REBAR SCHEDULE:**

- a = +0", -1-1/2"
- b = +1/4", -0"
- c = +0", -1/4"
- d = +1/2", -0"
- ① = 13 ea. 90"
- ② = 4 ea. 53"
- ③ = 2 ea. 24"
- ④ = 6 ea. 12"
- ⑤ = 4 ea. 6"

APPROVED PADS	
MANUFACTURER	PAD
Jensen Precast	J-RS-37
Rockway Precast	R-RS-37

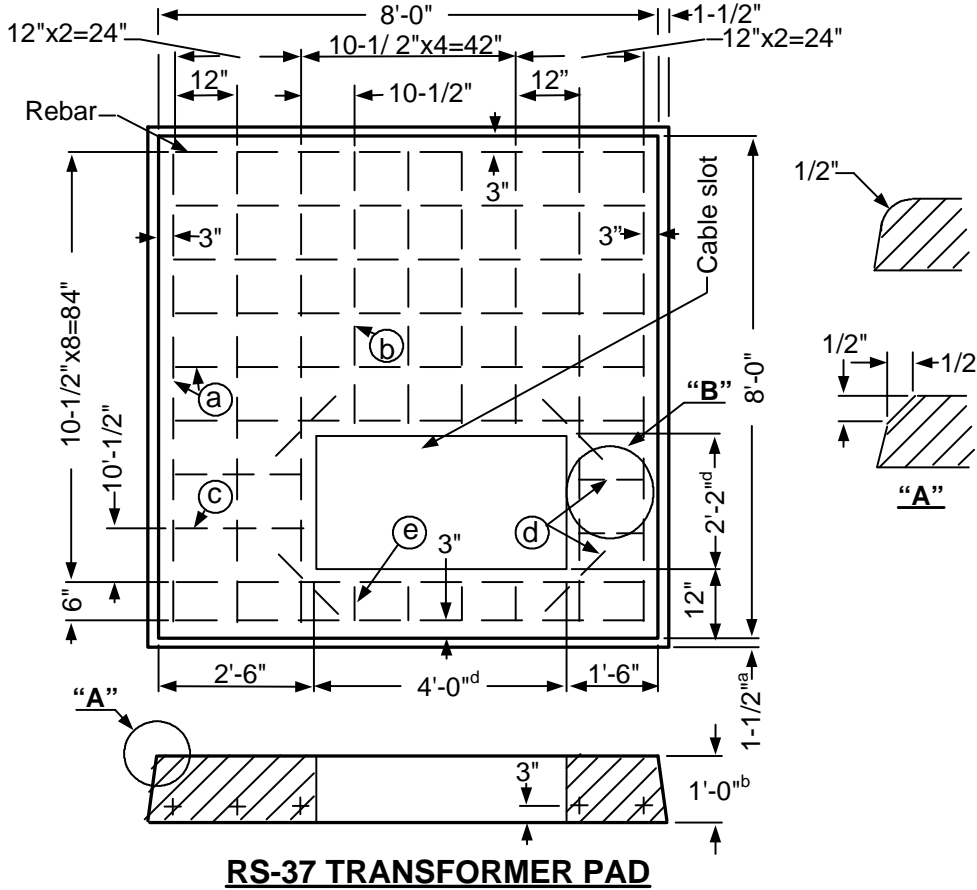


1. Rebar
  - A. Minimum #4
  - B. Placed into the above drawing according to the rebar schedule.
2. Pad
  - A. A 26" X 48" cable slot.
  - B. Shall meet RS-G2 and RS-G3.
3. Only the RSI-39 Pad
  - A. Two 2-1/2" X 2-1/2" X 1/4" mm. X66" hot dip galvanized steel angle.
  - B. A 1" diameter PVC ell with a minimum radius 5-3/4".
  - C. A 1" diameter PVC coupling.

	Electric Service Requirements	RS-37
	<b>Transformer Pad:</b> 3 Ph, 12/25KV 500-1000KVA @208V, 1000-2500KVA @480V	
Drawn: DH    Eng: DA    Appr: DA    Date: 10/06		Revision: 1 Page 1 of 2

# Equipment Pads

## INSTALLATION REQUIREMENTS

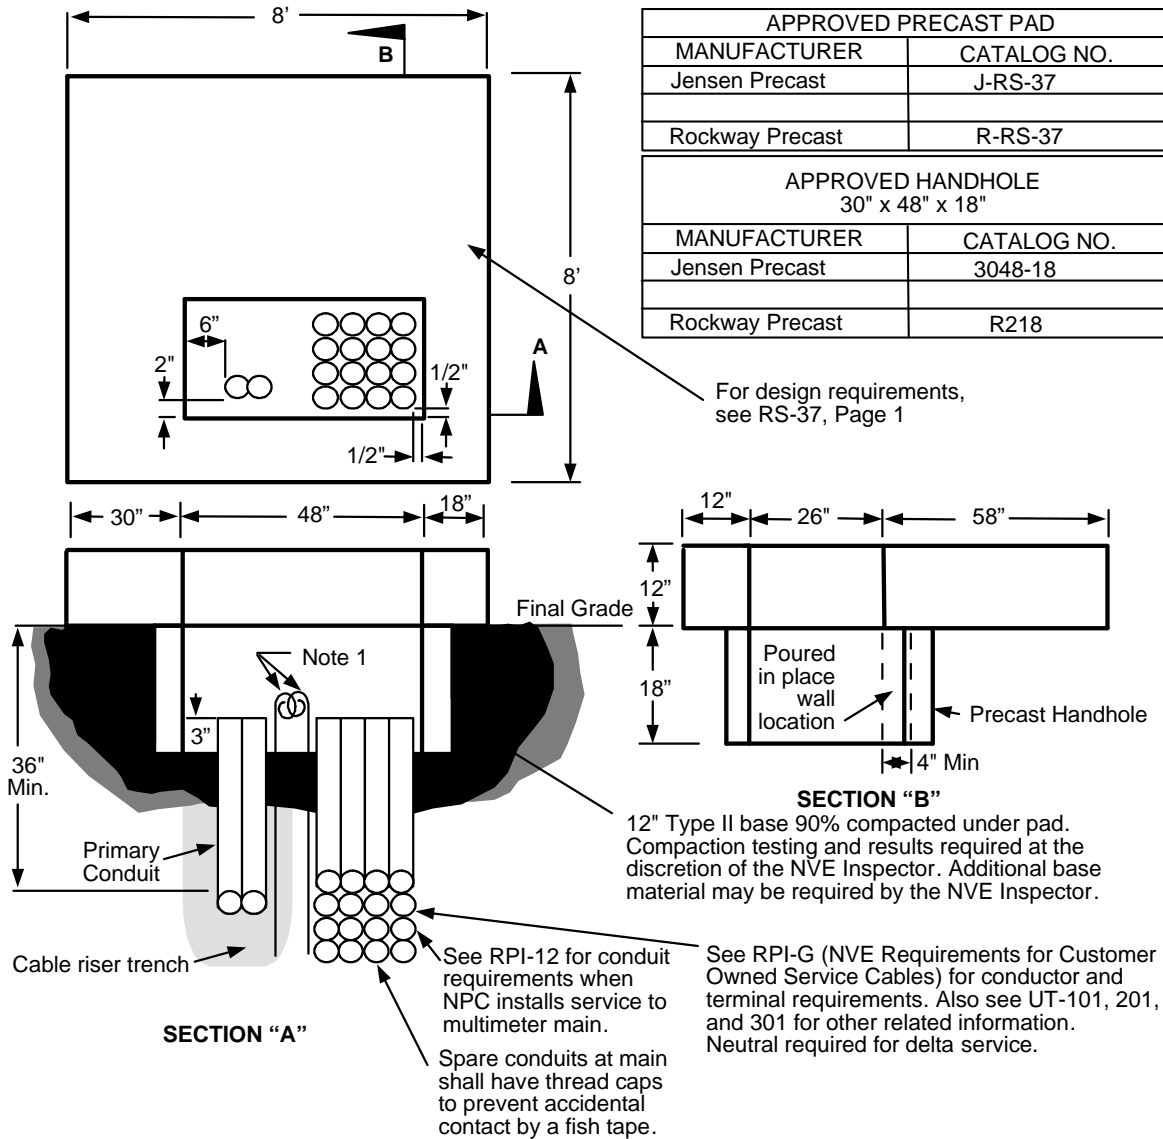

### NOTES:

- Grounding by customer shall be 2-50' #2 stranded bare copper ground wires laid in the bottom of the trench in opposite directions with 2-5' tails in the pad opening.  
**NOTE:** Only at the discretion of NVE's inspectors, a 1/2" x 8' copper ground rod can be installed.
- For location and clearances to other structures, see RS-5.
- Retaining wall required when grade from bottom of pad rises or lowers more than 1' in 5' horizontally.
- All secondary conduits shall be located within 24" of the right side of the pad opening.
- The top of the pad shall be leveled and must clear the final grade by 12".

				Electric Service Requirements		RS-37
				<b>Transformer Pad:</b> <b>3 Ph, 12/25KV 500-1000KVA @208V,</b> <b>1000-2500KVA @480V</b>		
Drawn:	Eng:	Appr:	Date:			Revision: 1
DH	DA	DA	10/06			Page 2 of 2