


Equipment Pads

DESIGN REQUIREMENTS

TOLERANCES: REBAR SCHEDULE:


- a = +0", -1-1/2"
 b = +1/4", -0"
 c = +1/2", -0"
 (a) = 6 ea. 72"
 (b) = 7 ea. 54"
 (c) = 3 ea. 22"
 (d) = 3 ea. 14"
 (e) = 12 ea. 12"

APPROVED PADS	
MANUFACTURER	PAD
Jensen Precast	J-RS-45
Rockway Precast	R-RS-45

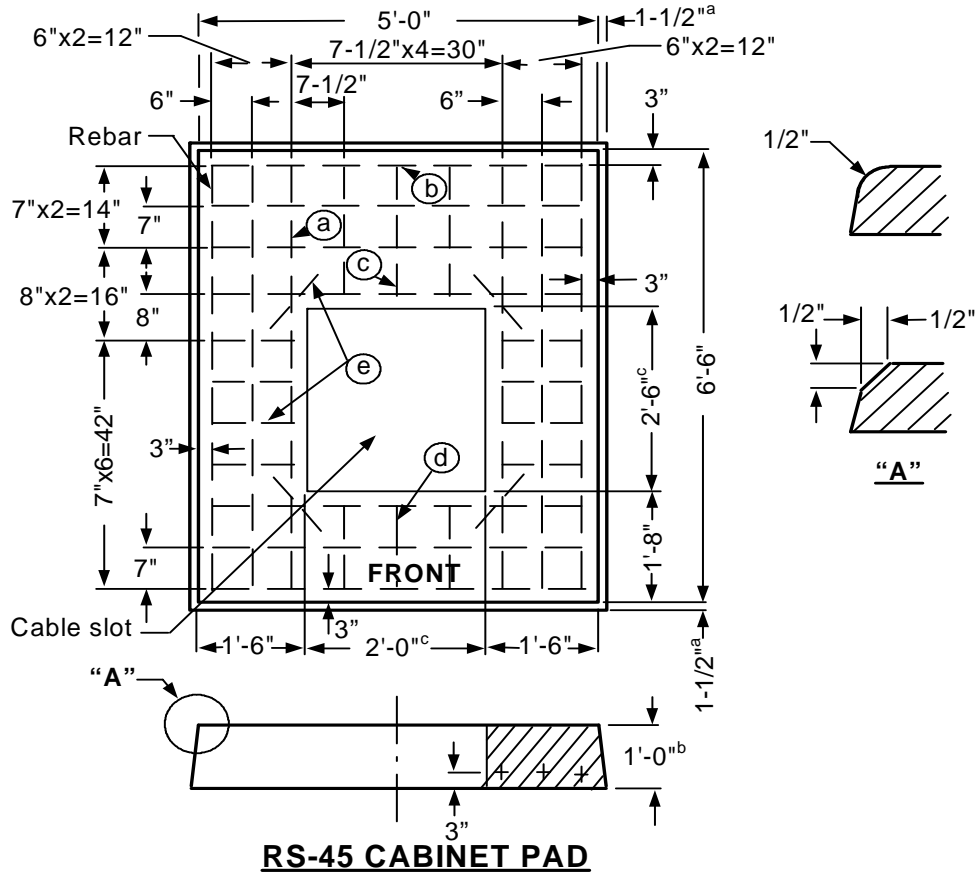


RS-45 CABINET PAD

- Rebar:
 - Minimum #4
 - Placed into the above drawing according to the rebar schedules.
- Pad
 - A 24" x 30" cable slot.
 - Have the word "Front" embossed on the top of the pad as shown.
 - Shall meet RS-G2 and RS-G3.

				Electric Service Requirements		RS-45
				Cabinet Pad: Fuse, 15kV		
Drawn:	Eng:	Appr:	Date:	Revision: 1		Page 1 of 2
DH	DH	DA	5/07			


Equipment Pads

Installation Requirements

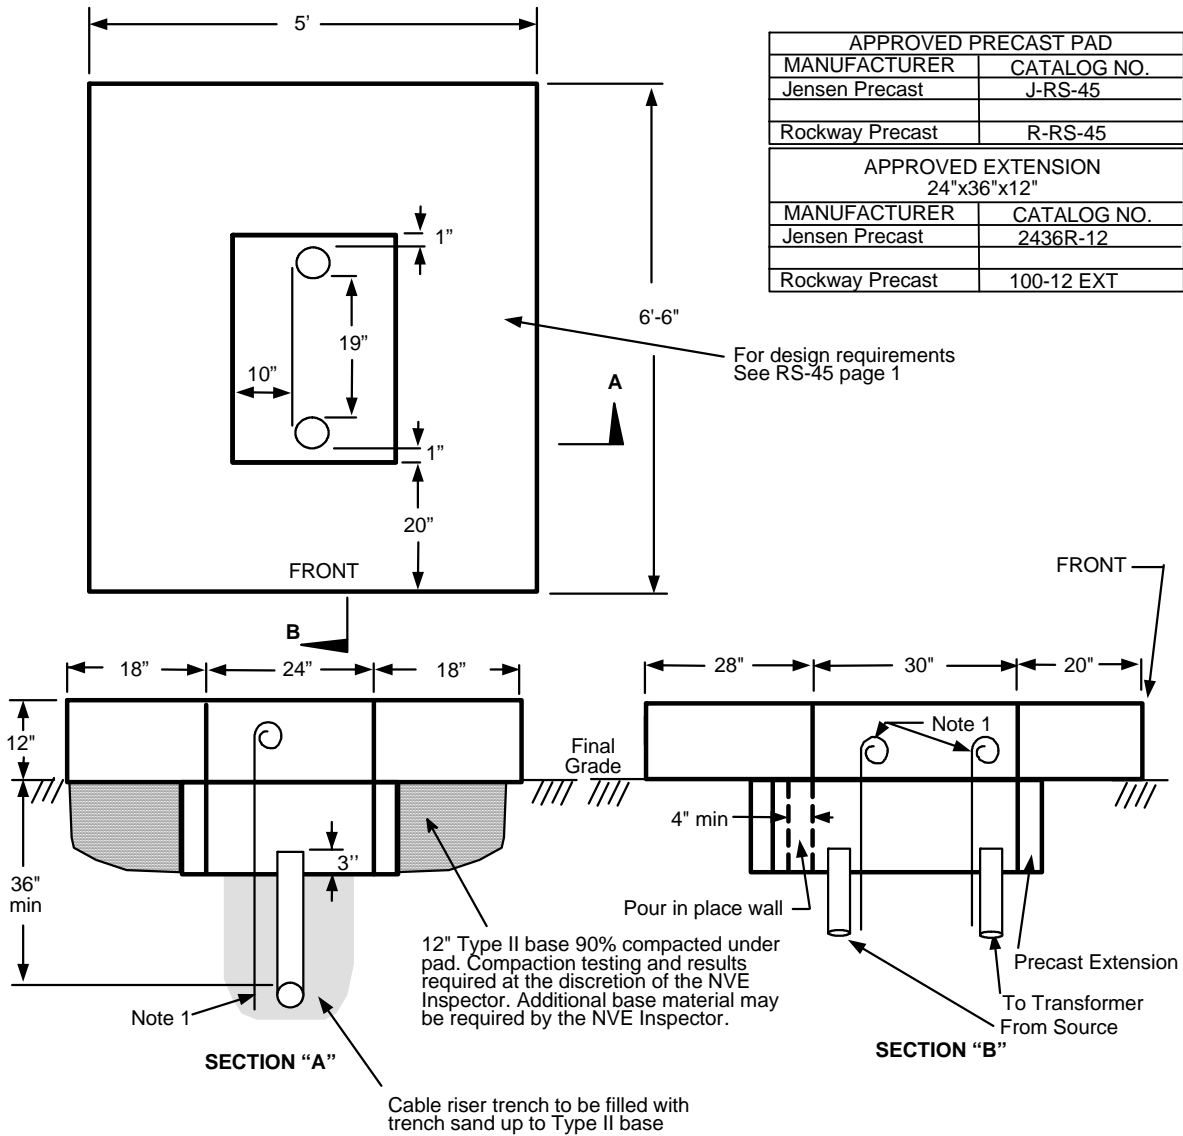

NOTES:

1. Grounding by customer shall be 2-50' #2 stranded bare copper ground wires laid in the bottom of the conduit trench in opposite directions with 2-5' tails in the pad opening. Note: Only at the discretion of NVE's inspectors, a 1/2"x8' copper ground rod can be installed.
2. For location and clearances to other structures, see: RS-5.
3. Retaining wall required when grade from bottom of pad rises or lowers more than 1' in 5' horizontally.
4. All secondary conduits shall be located within 24" of the right side of the pad opening.
5. The top of the pad shall be leveled and must clear the final grade by 12".

				Electric Service Requirements		RS-45
				Cabinet Pad: Fuse, 15kV		
Drawn:	Eng:	Appr:	Date:	Revision: 1		Page 2 of 2
DH	DH	DA	5/07			