


NON-PREFERRED POURED IN PLACE TRANSFORMER PADS**CONSTRUCTION NOTES:**

Refer to Volume 17 Standards; PE0001U and PE0003U/ PE0006U for dimension details.

Field cast pads as follows:

1. Compact and level area of proposed pad.
2. Pad location, forms, layout must be inspected and approved by NVE prior to pouring concrete (3000 psi at 28 days).
3. Shaded 'conduit window' area to be free and clear of concrete.
4. Reinforcing steel to conform to ASTM 615, #4 rebar will be grade 60.
5. Top of pad shall receive a smooth and level trowel finish. Corners and edges shall be rounded or beveled.

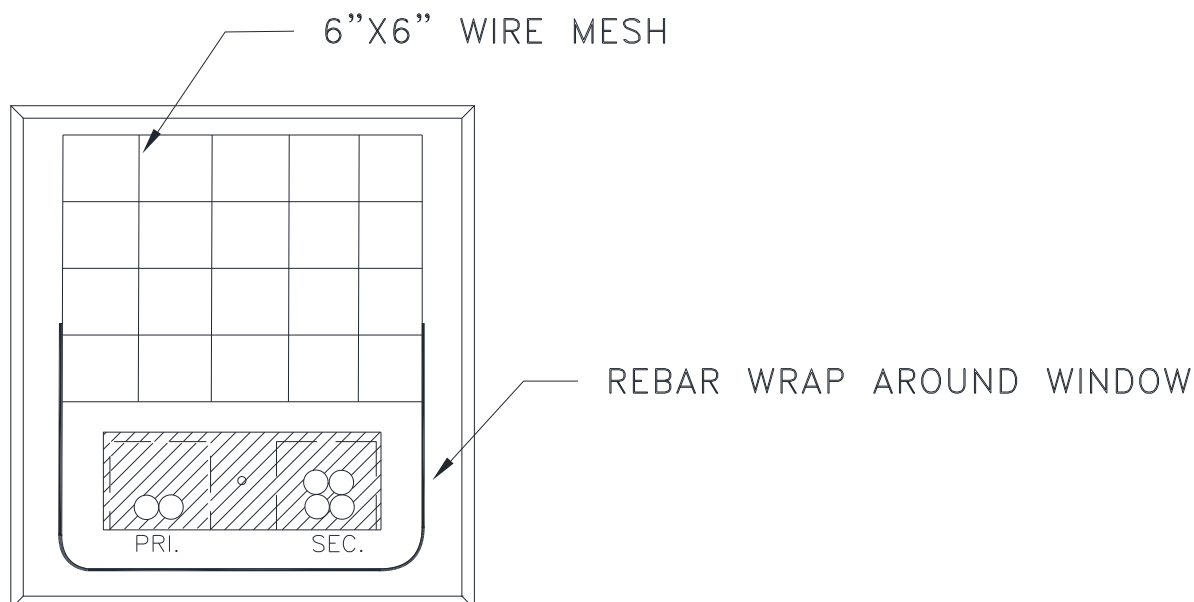

				VOLUME 17 – ENGINEERING & CONSTRUCTION STANDARD		PAD01XN
				TRANSFORMER PAD FIELD CAST REQUIREMENTS		
Drawn:	Eng:	Appr:	Date:			Revision: 0
	MB	DA	11/19			Page 1 of 1