


# Metering Equipment: Installation Requirements

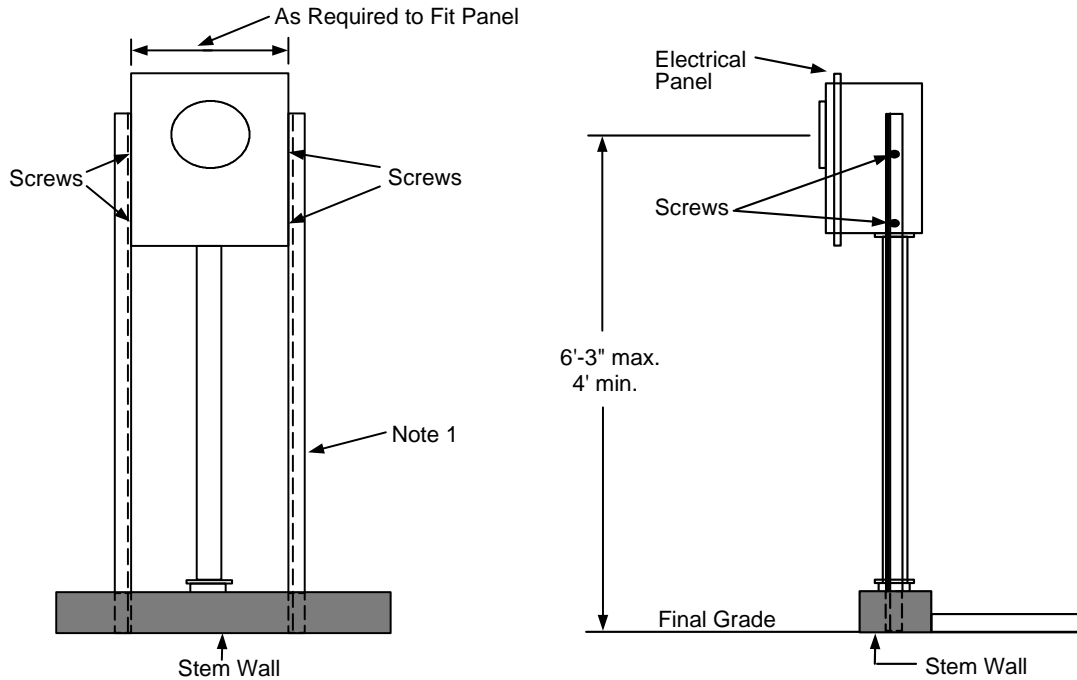


**NOTES:**

1. Framing shall be made of two 3-5/8" x 8' 18 GA. XC steel studs and secured to the panel by four 3/4" (max.) screws.

**GENERAL NOTES:**


1. Panels shall be installed according to section RPM of the ESR.
2. NVE inspector shall reserve the right to reject any installation.
3. NVE will not pull wire unless the framing for the wall containing the meter panel is erected or one of the other methods shown is properly installed, plumb and square.
4. The termination section cover shall be hinged, non-removable and sealable and have provisions for the installation of a securing screw on the front panel.

				Electric Service Requirements		<b>RPI-3</b>
				<b>Temporary Panel Stand</b>		
Drawn:	Eng:	Appr:	Date:			Revision: 1
MES	MES	DA	9/06			Page 1 of 2

# Metering Equipment: Installation Requirements

---

THIS PAGE INTENTIONALLY LEFT BLANK

				Electric Service Requirements		RPI-3
				Temporary Panel Stand		
Drawn:	Eng:	Appr:	Date:			Revision: 1
MES	MES	DA	9/06			Page 2 of 2