


Metering Equipment: Material Requirements

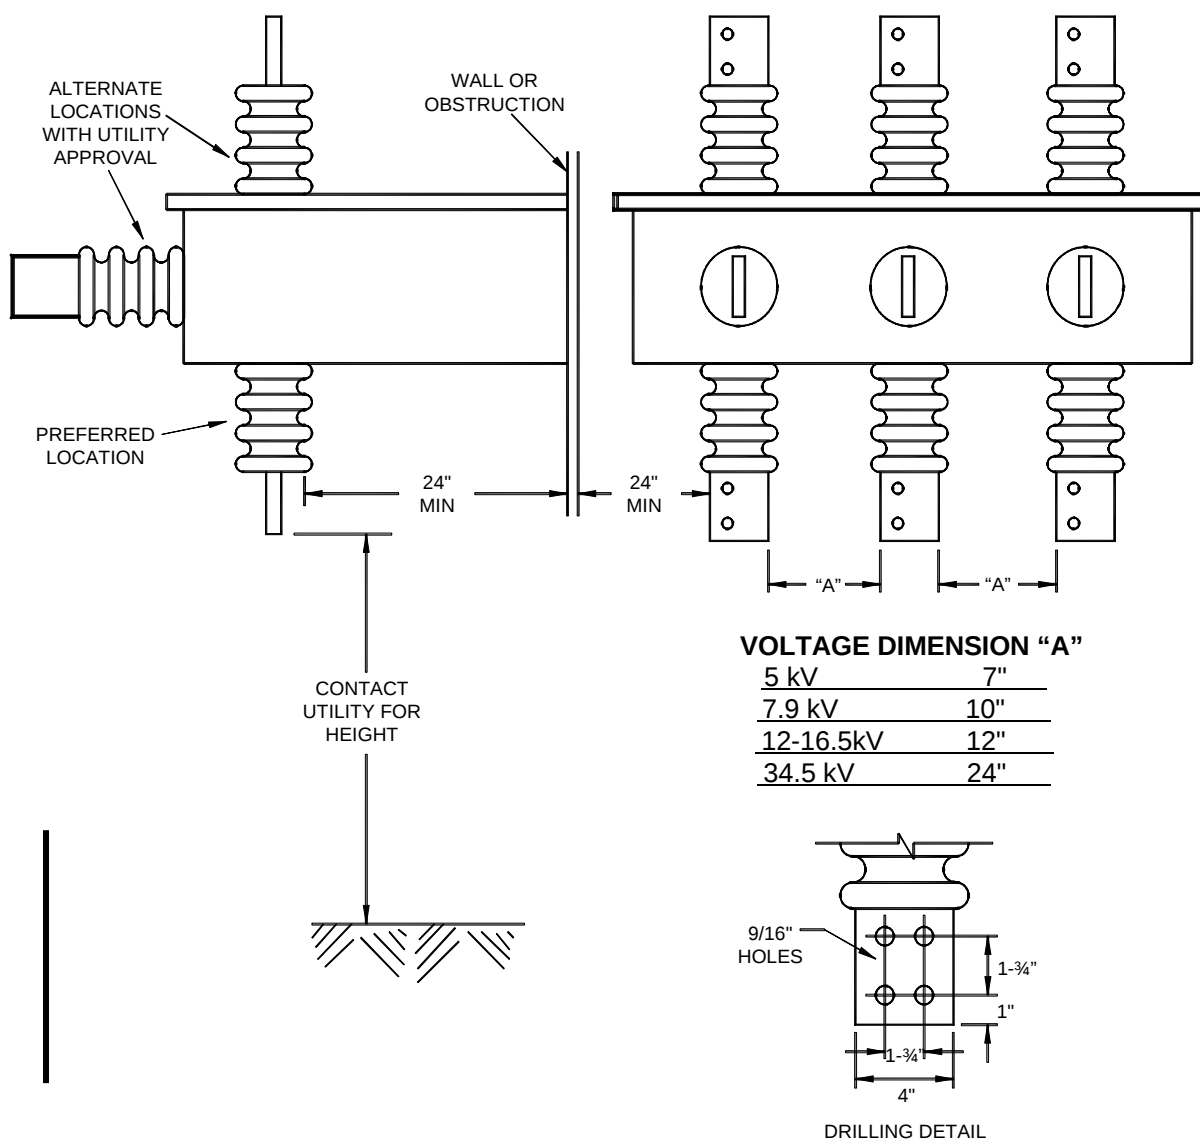

NOTES:

1. Number and size of lugs to be specified by utility.
2. Bushings to be spaced as shown in table above.
3. All bushings shall meet NEMA standards for creep distance, except 16.5kV which shall have 15" minimum creep distance.

				Electric Service Requirements		RPM-412
				Busway Servicehead: 3 or 4 Wire 750-34,500V		
Drawn:	Eng:	Appr:	Date:			Revision: 1
DH	DH	DA	2/07			Page 1 of 2

THIS PAGE INTENTIONALLY LEFT BLANK